

TakeOff™

Pipe Support Block



Versatile & Effective

Supports gas/plumbing piping, condensate/refrigeration lines, conduit, cable, and lightweight mechanical equipment

Reduces penetrations in roofing membrane. Allows for water pass-through and keeps pipe off the roof surface

Steel strut or the GridIron™ support can be attached to top where 6" height is mandatory (refer to local code).

Durable

U.V. stabilized HDPE material supports loads up to 200 lbs. in temperatures from -50° F to 175° F.

Supports loads up to 250 lbs. when used with metal strut

 **Made in the USA**



Supply

Drainage

Support

Specialties

www.siouxchief.com


TAKE THE FIELD.



Top surface allows for attachment of various types of pipe/tube clamps or support accessories (see A / B / C, below)

Injection-molded HDPE is UV-stabilized, and contains recycled material

Wide base flange increases surface area for better load distribution.

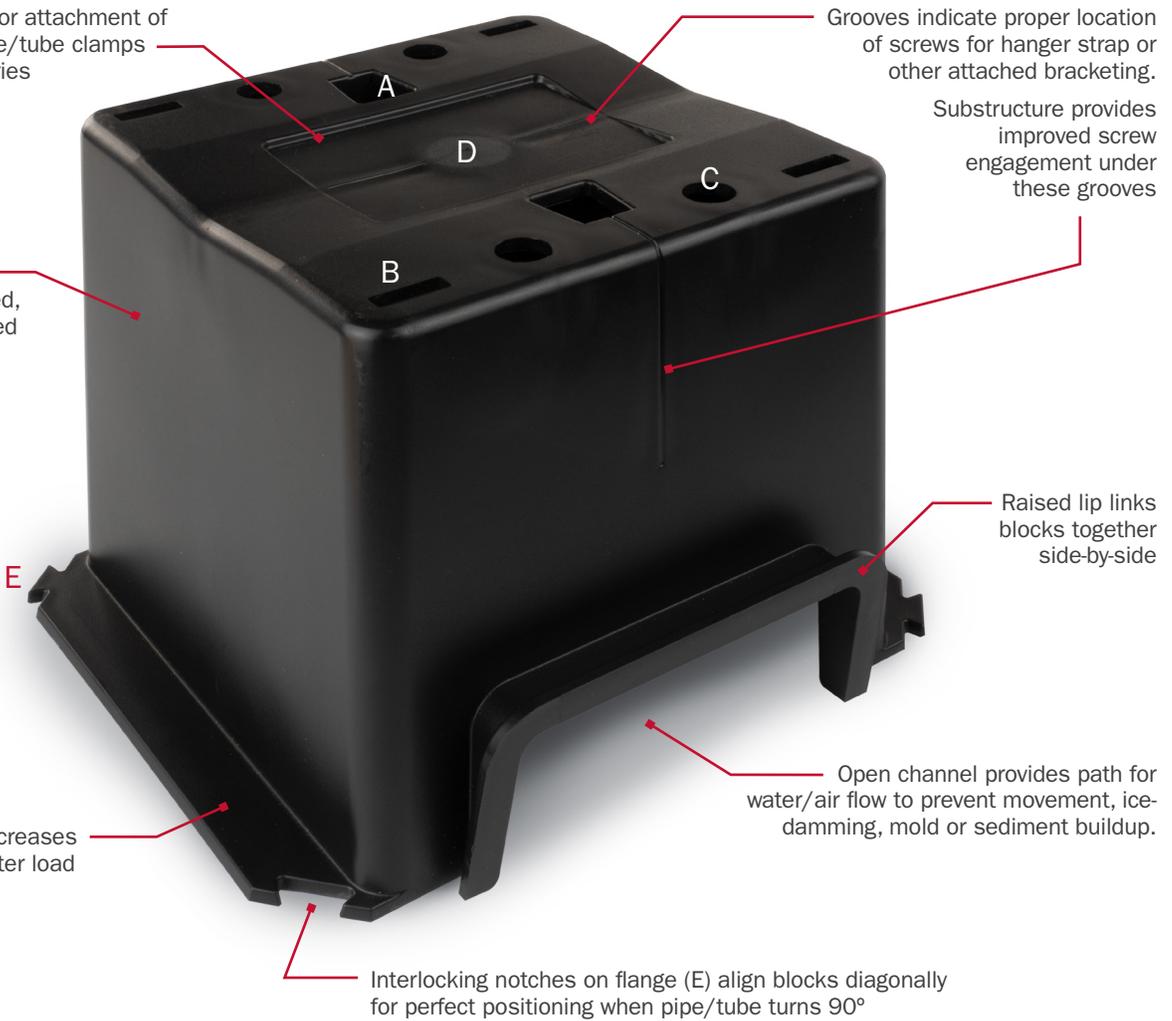

Grooves indicate proper location of screws for hanger strap or other attached bracketing.

Substructure provides improved screw engagement under these grooves

Raised lip links blocks together side-by-side

Open channel provides path for water/air flow to prevent movement, ice-damming, mold or sediment buildup.


Interlocking notches on flange (E) align blocks diagonally for perfect positioning when pipe/tube turns 90°

- A:** Unique openings (2) allow use of inverted TD+ Universal Clamp (550-2111) to fasten 1/2" CTS -2" IPS
- B:** Slots (4) for stainless steel bands or zip ties | **C:** Holes (4) for 3/8" thread rod with hex nut sockets on underside
- D:** Center rectangular recess is designed to securely mount a 541 Series top plate connector

Additional Features















Lightweight & Stackable
Easy to carry and transport on the job site.

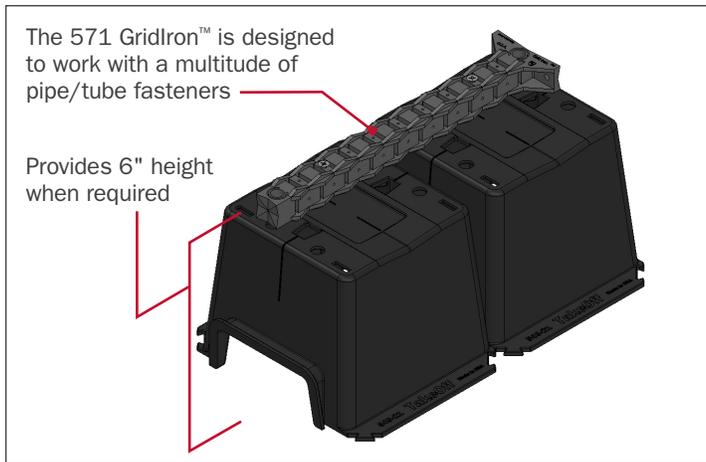

Additional Height
For additional height, strut can be attached to the TakeOff™, or use the GridIron™ ABS spacer/support block

Typical Installations

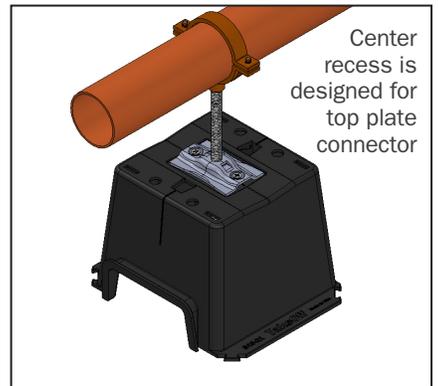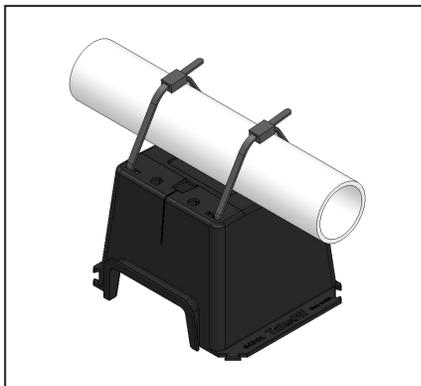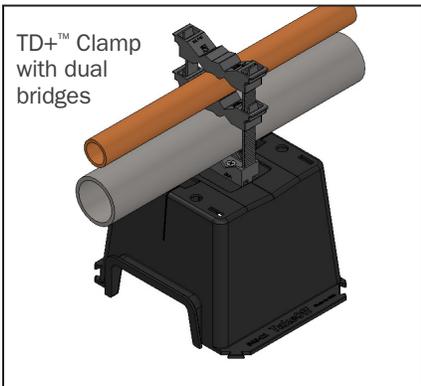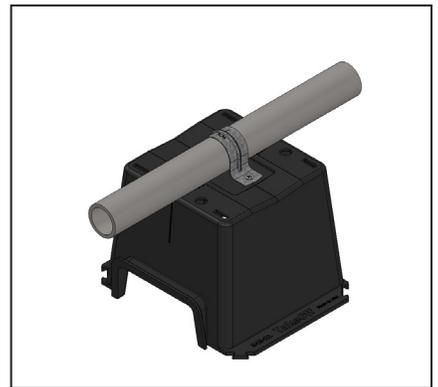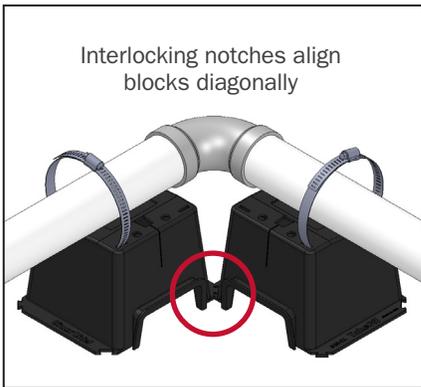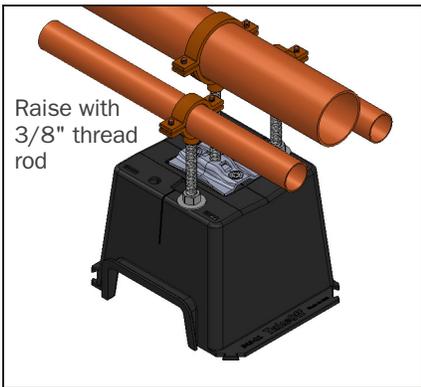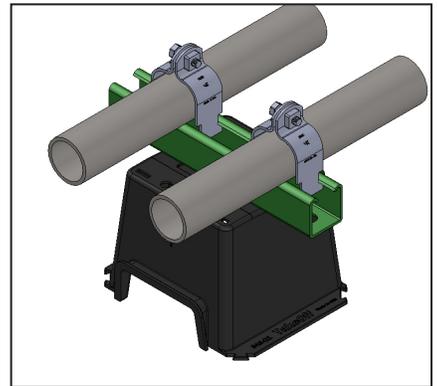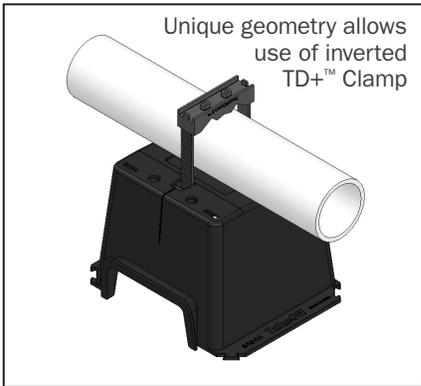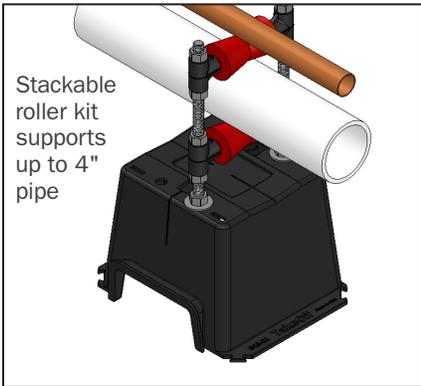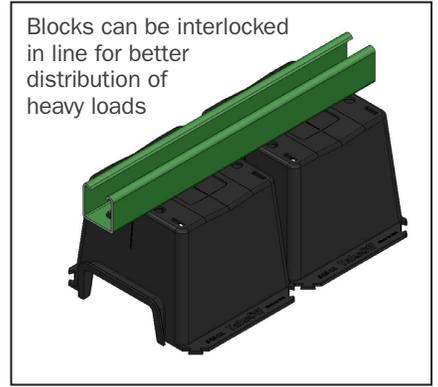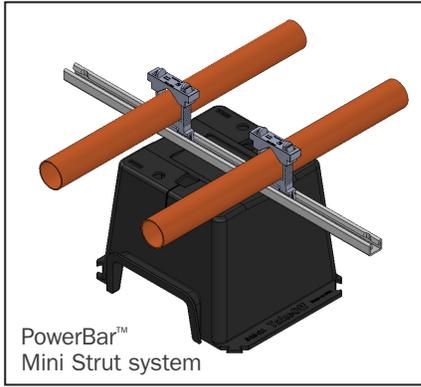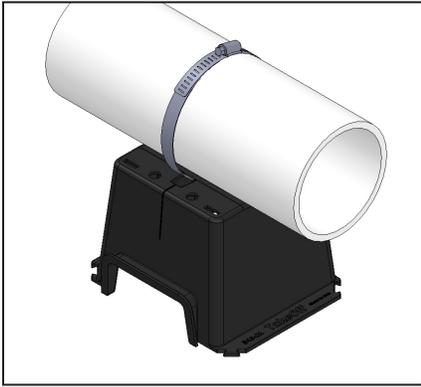

Other Clamps/Brackets for Use with the TakeOff™ ...



571
GridIron™ Spacer Block



524/528 Series
Hanger Strap



523 Series
SaddleUp™ Clamp



516 Series
Split-Ring Hangers



501/502 Series
Tube Strap



517 Series
Strut Clamps



523 Series
PowerBar™ Mini Strut System



543-21



543-21R



541-GB



550-2111



550-2112

» Buying Information

ITEM NO.	DESCRIPTION	MIN. QTY.	CASE QTY.
TAKEOFF™ PIPE SUPPORT BLOCK			
543-21	TakeOff™ Pipe Support Block	8	8
ACCESSORIES			
543-21R	Roller Support Assembly Kit for TakeOff - Supports up to 4" pipe. For 3/8" threaded rod	8	8
550-2111	TD+™ Universal Clamp with single bridge - Clamps 1/2" CTS - 2" IPS. Attaches directly to TakeOff block	50	50
550-2112	TD+™ Universal Clamp with two bridges - Clamps 1/2" CTS - 2" IPS. Attaches directly to TakeOff block	1	25
541-CB	Copper-Plated Top Plate Connector - For 3/8" threaded rod. Use with 516 Series split-ring hangers	25	25
541-GB	Galvanized Top Plate Connector - For 3/8" threaded rod. Use with 516 Series split-ring hangers	25	25
571	GridIron™ ABS spacer/support block	8	8