

CTS STRAP

» 525-02 and 525-03 SERIES

SimpleStrap™

SPECIFICATION

Sioux Chief SimpleStrap™ CTS tube straps shall be used where necessary to secure 1/2" and 3/4" CTS tubing in residential or commercial applications. Strap is designed to work with Sioux Chief's perforated 525 series support brackets to secure horizontal water supply stub outs when penetrating through a wall or to stabilize 1/2" or 3/4" vertical pipe runs within the stud cavity. The SimpleStrap™ is compatible with copper, PEX or CPVC. Shall be IAPMO certified.

MATERIALS

Standard: High impact polypropylene (gray)

Glueable: ABS (natural)

INSTALLATION

Secure bracket (purchased separately) to vertical wood or metal studs. Hold strap at an angle and position small round "tooth" through hole on support bracket at desired location. Move strap so that the steel bracket is captured behind the small vertical ears located above the pipe hole. Lift side of the strap opposite tooth up and over to hook onto the bracket. Push CTS tube or stub out through pipe hole. One step glue can be used on glueable clamp option on horizontal wall penetrations.

SAFE WORKING TEMPERATURE

Impact resistant to 0°F

Maximum Temperature 140°F

SAFE WORKING LOAD

25 lbs.

DIMENSIONS

A: Tube size	1/2" CTS	3/4" CTS
B: Overall length	3.36"	3.36"
C: Overall height	1.15"	1.15"
D: Centerline of pipe to top of bracket	1.035"	1.16"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____




525-03

525-02G



525-20

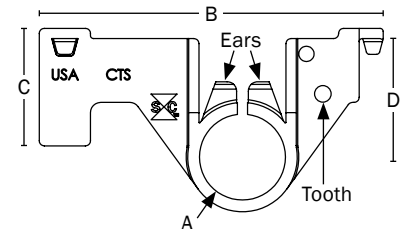

Made in USA

Create Item Number

525-0A

e.g. 525-02: 1/2" CTS SimpleStrap™

TUBE SIZE A

2 = 1/2" CTS

3 = 3/4" CTS

2G = 1/2" CTS, glueable