

ADJUSTABLE LOOP HANGER

» 514-G SERIES

Loop Hanger

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 514 series galvanized adjustable loop hangers shall be used where necessary to suspend or support non-insulated stationary IPS piping from threaded rod. Hanger shall be installed in accordance with national code requirements for light commercial applications. Hanger shall be sized to allow for thermal expansion and contraction. Hanger shall comply with MSS SP-58 Type 10 and WWH-171 Type 10. Hanger shall be UL and IAPMO certified.

MATERIALS

Hanger: 18-ga. pre-galvanized per ASTM A653

Nut: 3/8-16" zinc-plated steel

MAXIMUM LOAD RATING

300 lbs.


DIMENSIONS

Dimensions = Inches.

IPS	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A: Width	0.75	0.75	0.75	0.75	0.75	0.75
B: Height	2.40	2.66	3.00	3.25	3.72	3.57
C: Tube Centerline	1.65	1.78	1.95	2.08	2.31	2.07



514-G07

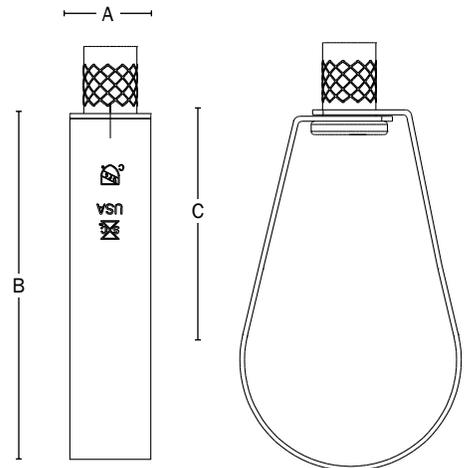

Made in USA

Create Item Number

514-G0A

e.g. **514-G04:** Adjustable loop hanger for 1" IPS

PIPE SIZE A

- 2 = 1/2"
- 3 = 3/4"
- 4 = 1"
- 5 = 1 1/4"
- 6 = 1 1/2"
- 7 = 2"